

Euro Profile Cylinder Measuring Size Guides

LIT-PHD-EPC

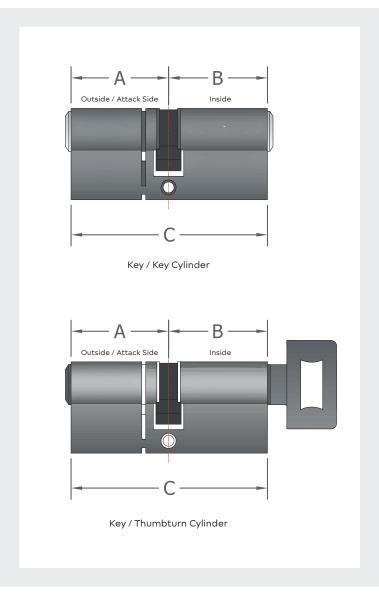

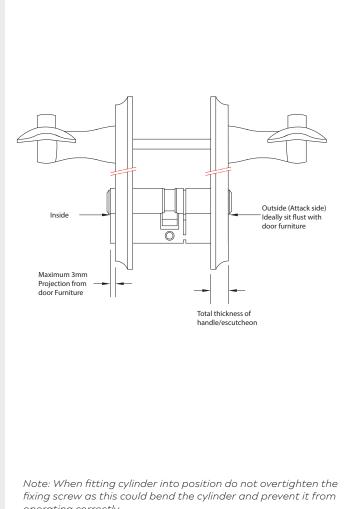

operating correctly

Measurement of A + B should always = C (3 star cylinder shown in diagram above)

Our cylinder part numbers explained (when ordering cylinders we always state the 'Attack/Outside' side first):

Example: KPD4535-KTD-NK - KPD (Double Cylinder) -45 (Outside/Attack Side) - 35 (Inside) - KTD (Keyed To Differ) -**NK** (Nickel Finish)

Example: KPT3545-RKA-SB - KPT (Thumb Turn Cylinder) -35 (Outside/Attack Side Key) - 45 (Inside Thumb Turn) -RKA (Random Keyed Alike) - SB (Satin Brass)



CYLINDER SIZING GUIDE FOR

SINGLE & DOUBLE HANDLE DOORS

LIT-PHD-EPC

Single Door or Double Doors with Single Handle (SOLO) - measured central to door thickness Double Doors with Double Handles (KLONE) - measured from 22mm centre line

Based on 56mm Door Thickness for SOLO Multipoint Lock	
Handle/Escutcheon Total Thickness	Cylinder Size
1-7mm	35/35
8-12mm	40/40
13-17mm	45/45

Based on 58mm Door Thickness for SOLO Multipoint Lock		
Handle/Escutcheon Total Thickness	Cylinder Size	
1-6mm	35/35	
7-11mm	40/40	
12-16mm	45/45	

Based on 56mm Door Thickness - Open In Double Doors - KLONE		
Handle/Escutcheon Total Thickness	Cylinder Size	
3-6mm	40/35	
7-11mm	45/35	
11-13mm	50/35	

Based on 56mm Door Thickness - Open Out Double Doors - KLONE	
Handle/Escutcheon Total Thickness	Cylinder Size
3-6mm	35/40
7-11mm	35/45
11-13mm	35/50

Based on 58mm Door Thickness - Open In Double Doors - KLONE		
Handle/Escutcheon Total Thickness	Cylinder Size	
3-4mm	35/40	
5-9mm	35/45	
10-12mm	35/50	
13-14mm	40/50	

