

FITTING GUIDE

SE40-EXT-KIT

Kit for enabling SE40 Range to be fitted to door thickness up to 60mm


SE40-EXT-KIT Kit comprises of:

- 1 x CX-2580 2.5mm Hex Key
- 2 x FX-GS-M58-TI-USS M5 Grub Screw with Threadlock
- 2 x FX-392-USS M5 Bolt Connector Sleeve




Take the two M5 Nyloc grub screws and insert them into the 2 holes located in the SE40 Escutcheon.

The purple end denotes the Nyloc coating, this will stop the grub screw from working loose.

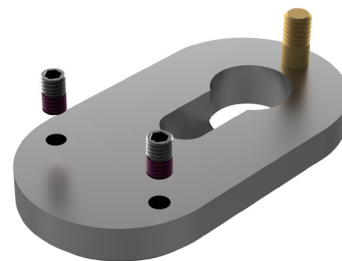


Using the Hex Allen Key fit the M5 Grub Screws.

NOTE: These screws should not be screwed the whole way in, they need to be left protruding 4mm.

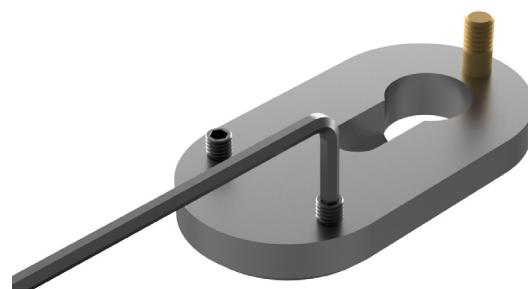

Locate the 2 x FX-392 sleeves and tighten them over the remaining grub screw thread, the SE40 is now ready to install

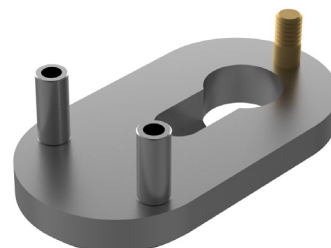

COASTAL

Shaping the future.