

TVF FITTING INSTRUCTION

FIXING AND OPERATING INSTRUCTIONS

INSTRUCTIONS:

- 1. Prepare slots and pre-drill fixing holes, avoiding glazing rebates.
- 2. Fix vent (with snib on the right) canopy using screws and attach screw covers.


DO NOT OVER TIGHTEN SCREWS!

Recommended screws:

Vent & Canopy: 3.5mm (No.6) Pan head or equivalent.

We recommend use of silicone sealant along the canopy sealant groove.

If vent supplied with protective cover tape, do not remove tape until authorised.

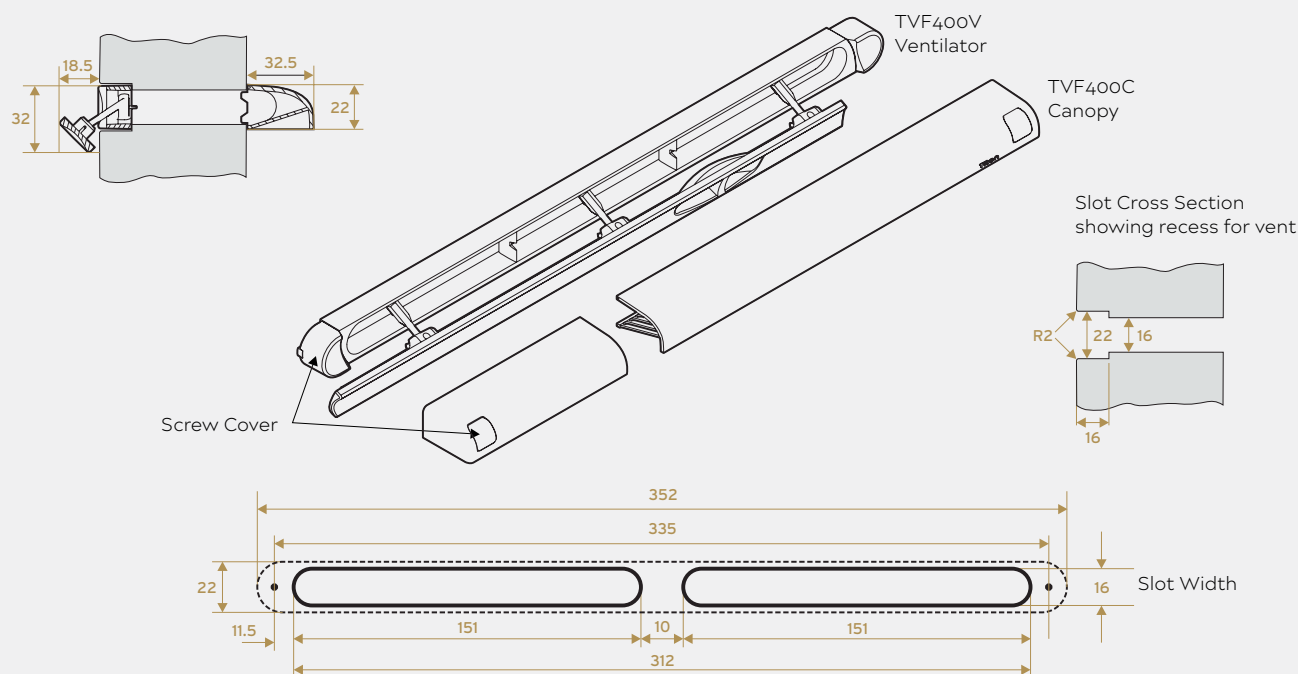


N.B. Any significant variation of the applications shown will affect the EA performance of the product combination

DIMENSIONS	OVERALL LENGTH	EQUIVALENT AREA (EA) - SCREW FIX**	FREE AREA (SCREW FIX)
TVF400V	351	4600mm ²	4523mm ²
TVF400C	364	4600mm ²	4900mm ²

** Tested in accordance with BS:EN 13141-1 (2004)

SILICONE SEALANT APPLICATION

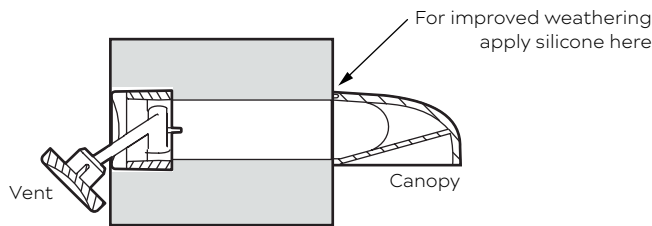

* All dimensions in mm unless otherwise stated.

TVF FITTING INSTRUCTION

FIXING AND OPERATING INSTRUCTIONS

INSTRUCTIONS:


This product is is designed to be used with the Trimvent Select Xtra R16Ventilator.

- 1. Position grille centrally over slots and locate grille upstand in groove on underside of head drip.
- 2. Secure grille to frame using pins or staples of appropriate material.

Grille is moulded in polypropylene; care should be taken to ensure that timber finishes or processes do not affect the integrity of grille.

To maintain Equivalent Area when tested with TV Select XR16 slot and underside of head drip should be manufactured in accordance with dimensions supplied by Titon.

If vent supplied with protective cover tape, do not remove tape until authorised.

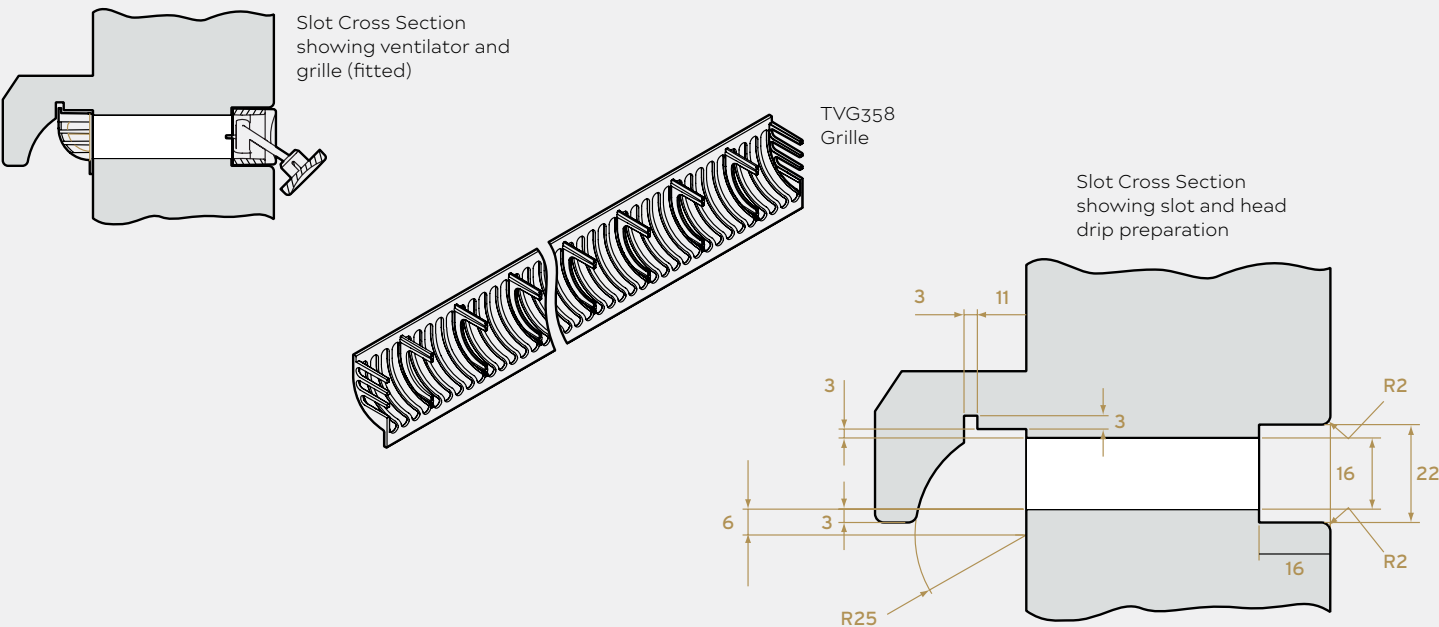

N.B. Any significant variation of the applications shown will affect the EA performance of the product combination

DIMENSIONS	OVERALL LENGTH	EQUIVALENT AREA (EA) - SCREW FIX**	FREE AREA (SCREW FIX)
TVF400V	351	4600mm ²	4523mm ²
TVG358	358	4600mm ²	5345mm ²

** Tested in accordance with BS:EN 13141-1 (2004)

* All dimensions in mm unless otherwise stated.