

Euro Profile Cylinder - Measuring Size Guide.

Thumb Turn / Key Cylinder

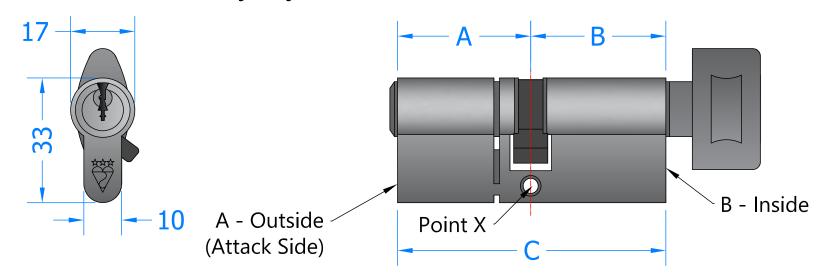

Key / Key Double Cylinder

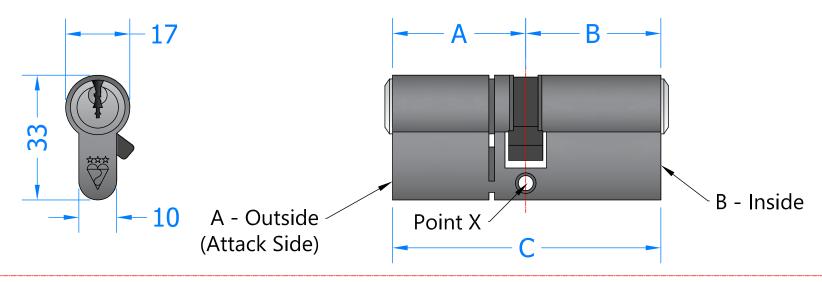

Note: Cylinder part numbers explained:

Example: KPD4535-KTD-NK

KPD (Double Cylinder) - 45 (Attack Side) - 35 (Inside) - KTD (Keyed to Differ) - NK (Nickel)

Example: KPT3545-RKA-SB

KPT (Thumb Turn Cylinder) - 35 (Attack Side Key) - 45 (Inside Thumb) - RKA (Random Keyed Alike) - SB (Satin Brass)

Measurement of A + B Should Always = C

REVISIONS			1
Revision	Description	Drawn By	Date
С	Released	PW	24/2/20

Cylinder Removal

- Remove the screw which passes from the door edge into the cylinder at Point X.
- Turn the key to align the cam with the body.
- Slide the cylinder out to the inside.

If a Euro Cylinder with Thumb Turn is fitted, there is no need to insert a key, just rotate the turn knob and slide the cylinder out to the turn knob side.

If the cylinder is tight and will not move you may need to loosed the door furniture and/or locking mechanism to facilitate the removal of the cylinder.

Cylinder Measurement

Using the diagram to the left as a guide, take the measurement of A, B and C, the sum of A plus B should always equal C.

Measurement of A (Attack Side): _____mm.

Measurement of B: (Inside):_____


Measurement of C: (Overall Size):


Ideally the cylinder should fit flush with the door furniture/escutcheon. This is not always possible, but in all cases it should not project more than 3mm outwards from the furniture.

Cylinder Fitting

- Align the cam with the cylinder's body by turning the key.
- Slide the cylinder in from the key side.
- Replace the screw which passes from the door edge into the cylinder

at Point X.

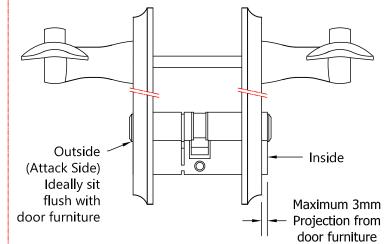



rements are finished dimensions in MM.