



Drawing Revision History		
Revision	Description/Change	Date
A	Release	29/8/2018

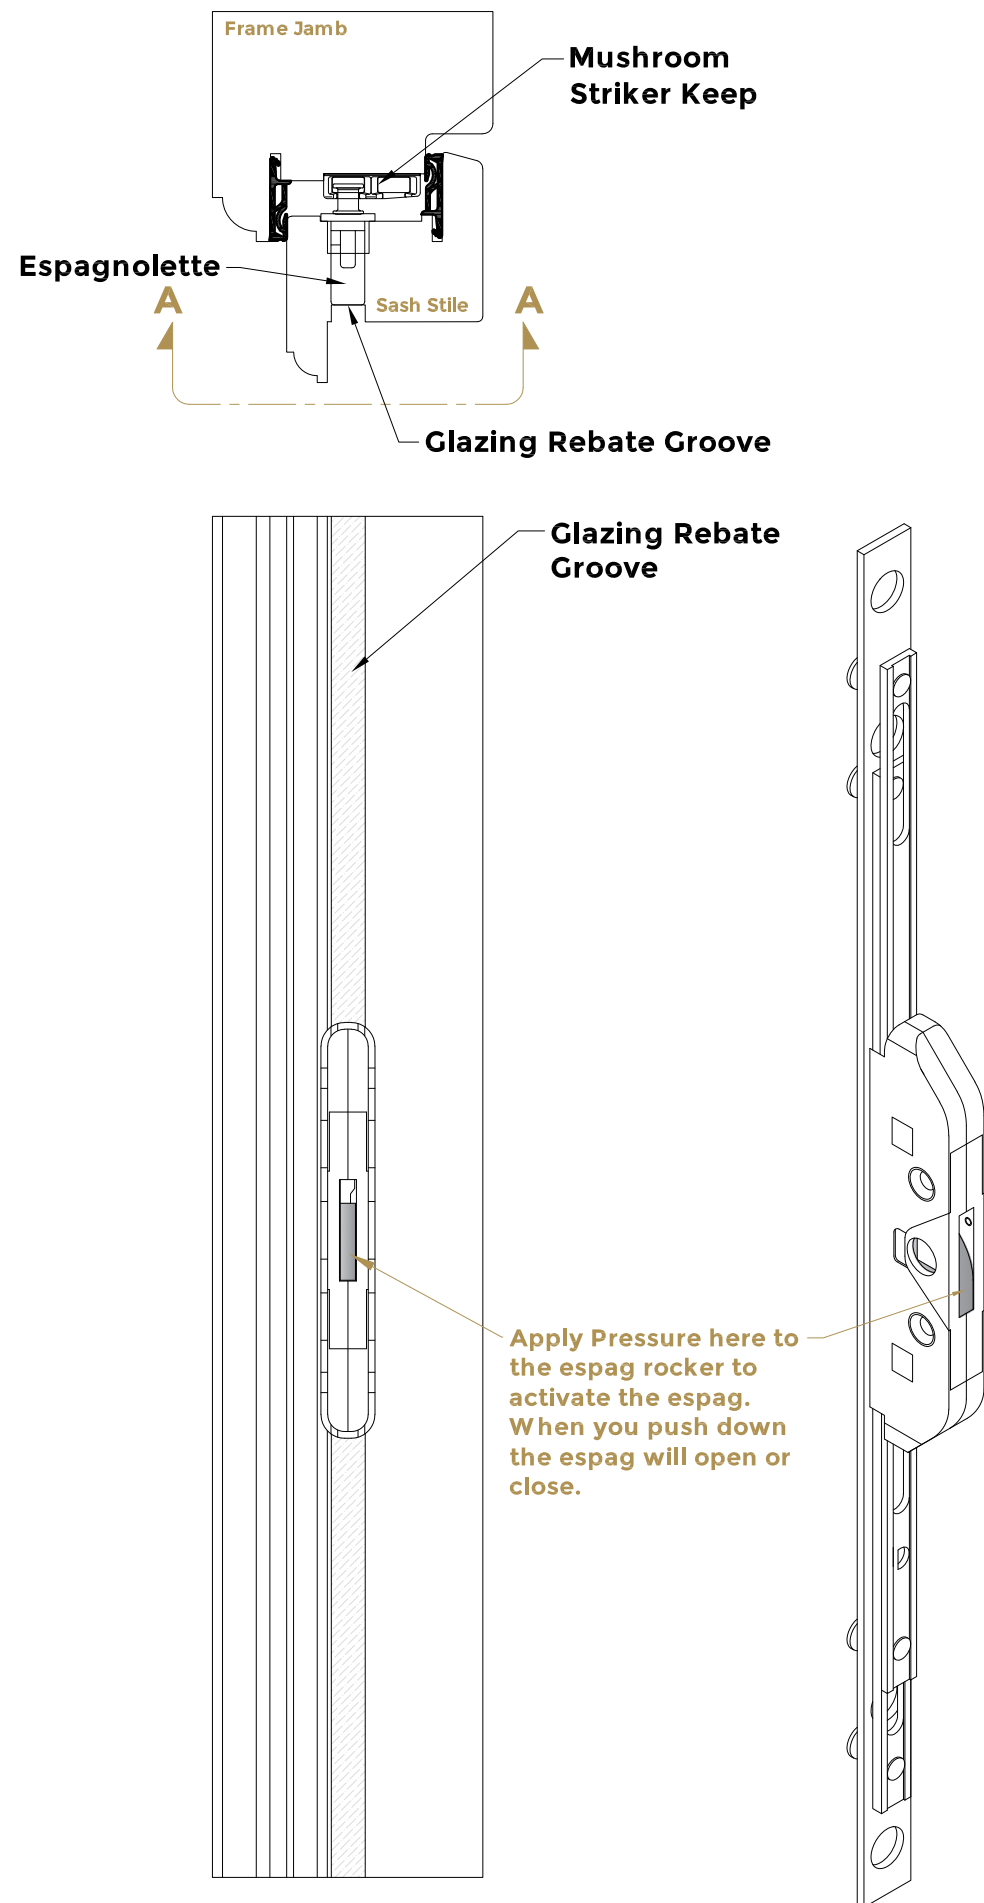

Section A-A

Using the EBT Espag bolt to secure a dummy sash.

- 1) When machining the sash, machine the same as you would for the opening sash but do not machine the handle holes in the sash stile, the pocket for the espag should be visible in the glazing rebate groove.
- 2) Fit the Sash using friction hinges as normal, fit the EBSK mushroom keeps to the frame & espag to the sash stile.
- 3) Mount the sash and close, then apply pressure to the rear of the espagnolette which is visible from within the glazing rebate as shown to the left to fire the espag and lock the sash into place.
- 4) Glaze the sash once fitted, this will then give the effect of a dummy sash but using the same hardware as an opening sash.
- 5) To remove the sash you will need to remove the glass, then apply pressure to the espag rocker to disengage the bolts, the sash will then open.



coastal-group.com
Shaping the future.

COASTAL

Part Number / Drawing Title:
**EBT Espagnolette Bolts
How to Secure a Dummy Sash**

Product Range:
Window Locks

Material: Tricoat EVO / Silver Passivated

Additional Info:

Date Drawn: 29/08/2018

Drawn By: Phillip Walklett

Part Number: EBT

File Name: EBT-DummySash.dwg

Revision: A

Drawing Scale: Not to Scale

Sheet Number: 1 of 1

THIRD ANGLE PROJECTION

This drawing and specification are the property of Coastal Specialist Ironmongery Ltd, they are issued in strict confidence and shall not be reproduced, copied or used without written permission.
EAOE - All dimensions are specified in mm.