



Klone Double Doors

TWIN HANDLE - SHOOTBOLT ON SLAVE DOOR ONLY

T 01726 871 025 E sales@coastal-group.com W coastal-group.com
© Coastal Specialist Ironmongery Ltd



COASTAL

Shaping the future.

The below tables show the components required based on door height.

Twin Handle (Klone) Components - Single Rebate

MASTER LOCK (ML60S-45-1-SV) - SLAVE LOCK (ML26S-45-LH/RH-22-SV)

DOOR HEIGHT	MASTER DOOR LOCK	SLAVE DOOR LOCK	SLAVE LOCK EXTENSION	SLAVE LOCK SHOOT BOLTS		KEEPS
	ML60S-45-1-SV	ML26S-45-LH/RH-22-SV	MK6S-SV	MS175-SV	MS372-SV	MS28-SV or MS24-SV
1825 - 1965mm*	1	1	-	2	-	2
1966 - 2160mm	1	1	-	1	1	2
2161 - 2610mm	1	1	1	1	1	2
2611 - 3060mm	1	1	2	1	1	2

Twin Handle (Klone) Components - Double Rebate

MASTER LOCK (ML60S-45-1-SV) - SLAVE LOCK (ML26S-45-LH/RH-12-SV)


DOOR HEIGHT	MASTER DOOR LOCK	SLAVE DOOR LOCK	SLAVE LOCK EXTENSION	SLAVE LOCK SHOOT BOLTS		KEEPS
	ML60S-45-1-SV	ML26S-45-LH/RH-12-SV	MK6S-SV	MS175-SV	MS372-SV	MS28-SV or MS24-SV
1825 - 1965mm*	1	1	-	2	-	2
1966 - 2160mm	1	1	-	1	1	2
2161 - 2610mm	1	1	1	1	1	2
2611 - 3060mm	1	1	2	1	1	2

NOTE: ML26 Slave Lock is handed


* Every 1mm cropped off the bottom shootbolt reduces spindle height by 1mm starting from 1050mm.

Door Lock Handing (as viewed from outside)

Right-Hand Lock

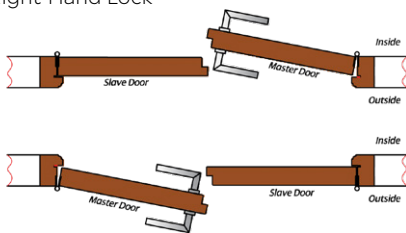

Left-Hand Lock

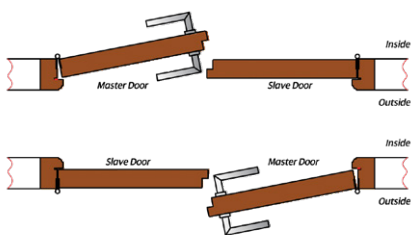

Ask about our Tooling



